


BADU BLUE & BADU BLUE PRO



WANT TO MANAGE ALL SWIMMING POOL COMPONENTS CENTRALLY?

Technical data	
Circuit board	Microprocessor controlled
Operating voltage	1~ 230 V, 50/60 Hz
Connection value (motor capacity P ₁)	Max. 0.90 kW
Fuse for circuit board/relay	1 A delay/400 mA relay/630 mA relay light
Max. permissible load current	250 V/4 A

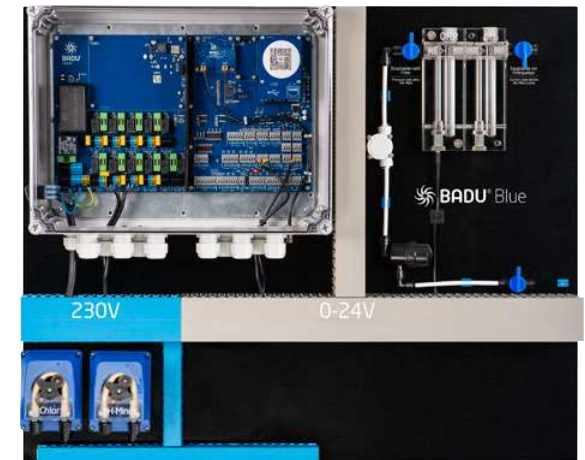

^ BADU Blue



^ BADU Blue Pro

> Further information can be found on page 4 of our brochure.