

Self-priming, corrosion-resistant, energy-efficient.
 Metering water pump with variable speed control for various operating points.




BADU® M3 Eco Soft



Materials used

Pump casing	PP
Intermediate housing	PP GF 30
Glue sockets	PVC
Impeller	PPE GF 30
Strainer basket	PP
Lid	PC, transparent/PA 66 GF 30
Mechanical seal	carbon/ceramic/NBR
Screws	stainless steel

Performance

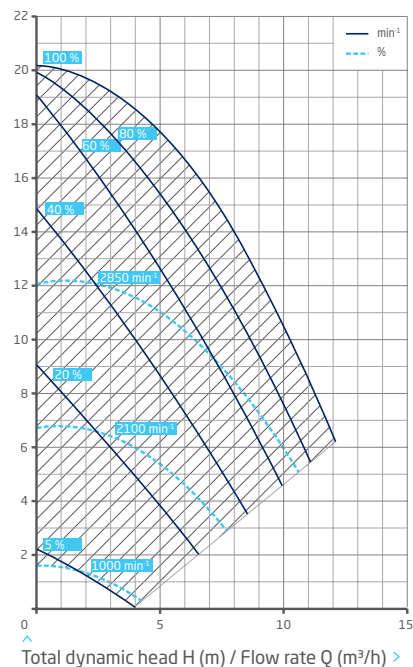

Technical data at 50/60 Hz		BADU M3 Eco Soft
Inlet dS/outlet connection dD Glue sockets		32/25
Rec. inlet/outlet pipe, PVC pipe, d ⁴⁾		50/50
Power input P ₁ /output P ₂ ¹⁾ (kW)	1~ 230 V	0.04-0.75/0.02-0.50
Rated current (A)	1~ 230 V	0.30-3.20
Net weight (kg)	1~	7.00